


2305 & 2306 AC Generator/Shore Source Selector Panels

2305 AC Six Branch Circuit Breaker Panel With Main

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Over 2000 interchangeable function labels available
- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels.
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane
- Hydraulic/magnetic, trip free Circuit Breakers.
- LED Indicators provided on all Premier Line Panels
- Voltage and Shore Cord Current: 30 AMPS, 120 VAC-60 HZ USA standard. Also available in 240 VAC-50 HZ.
- Branch Circuit: Available in 5, 10, 15, 20, 25 and 30 AMPS
- Main Breakers: Three pole main breaker interrupts AC hot and neutral lines while providing reverse polarity protection. (Main breaker trips automatically upon sensing reverse polarity).
- Dimensions: 5 1/2" W X 8 1/4" H X 3 1/2" D.
- Color: Black is standard. Optional: White, Gray and Beige.

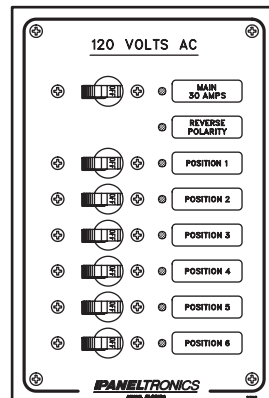


2305

2306 AC Eight Branch Circuit Breaker Panel

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Over 2000 interchangeable function labels available
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane
- Hydraulic/magnetic, trip free Circuit Breakers.
- LED Indicators provided on all Premier Line Panels
- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels
- Voltage and Shore Cord Current: 30 AMPS. 120 VAC-60 HZ USA standard. Also available in 240 VAC-50 HZ .
- Branch Circuits: Available in 5, 10, 15, 20, 25, 40, and 50 AMPS
- Dimensions: 5 1/2" W X 8 1/4" H X 3 1/2" D.
- Color: Black is standard. Optional: White, Gray and Beige.

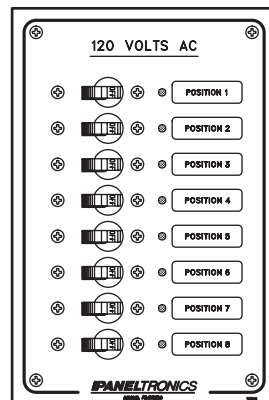

2306