


# 3404 AC/DC Twenty-Four DC Branch Circuits With Main

## 3404 AC/DC Twenty-Four DC Branch Circuits With Main Twelve AC Branch Circuits With Dual Shore Mains And Generator Main 120 VAC 60 HZ

### GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Panel mounted, isolated positive, negative, and grounding bus bars on DC breaker panels.
- Over 2000 interchangeable function labels available
- LED Indicators provided on all Premier Line Panels
- Panel is 1/8" corrosion resistant aluminum coated with two-part polyurethane
- Hydraulic/magnetic, trip free Circuit Breakers.
- DC Voltage: 12V standard. 24V and 32V OPTIONAL
- AC Voltage and Shore Cord Current: 30 AMPS, 120 VAC, 60 HZ USA standard. Also available in 240 VAC, 50 HZ
- DC Main Breakers: 100 A - standard. Also available in 50, 60, or 80 A..Main breaker provides 3000 AMPS interrupt capacity rating.
- Branch Circuits: Available in 5, 10, 15, 20, 25, 30, 40, and 50 AMPS.
- DC Metering: 8-16VDC expanded scale Voltmeter and 0-100 DCA externally shunted Ammeter - standard. Other scales, and digital meters available.
- AC Metering: 0-150 VAC scale Voltmeter and 0-50 ACA sca Ammeter are standard. Other analog scales a digital meters available.
- Generator: Rocker switches on both preheat and stop/start
- Load Selection: The Parallel Bus A+B switch permits the two isolated hot and neutral buses to be supplied.
- Dimensions: 13 3/4" W X 19 1/8" H X 3 1/2" D.
- Color: Black is standard. Optional: White, Gray and Beige.

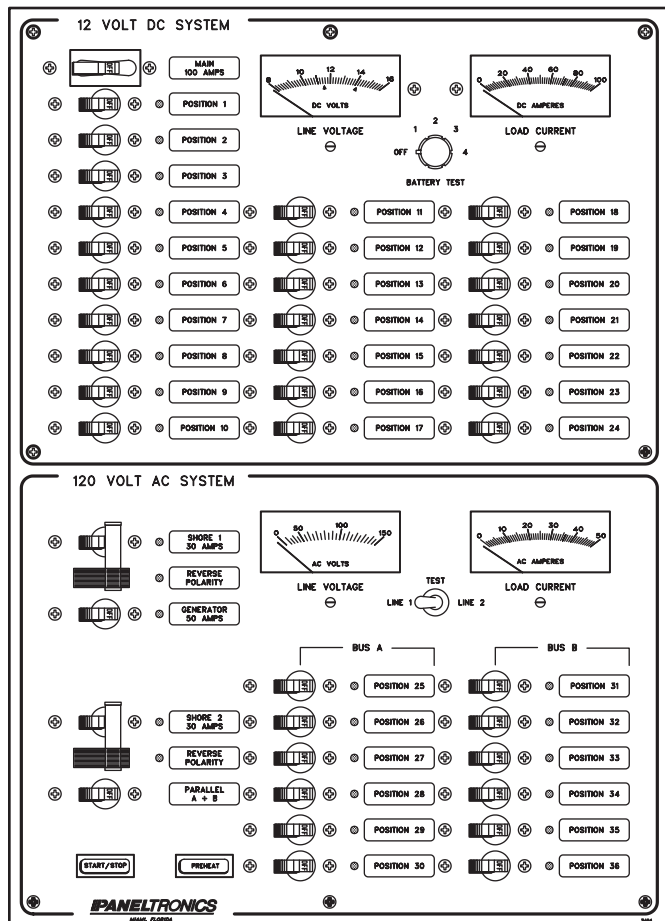

3404