
## 4206 DC Thirty-Two Branch Circuits

## 4206 DC Thirty-Two Branch Circuits

## **GENERAL FEATURES & BENEFITS**

- Completely pre-wired to reduce installation time
- Over 2000 interchangeable function labels available.
- Panel face is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- Panel mounted, isolated positive, negative, and grounding bus bars on DC breaker panels.
  LED Indicators provided on all Premier Line Panels
- Hydraulic/magnetic, trip free Circuit Breakers.
- Voltage: 12V standard. 24V and 32V optional.
- Branch Circuits: Thirty-two circuits. Available in 5, 10, 15, 20, 25, 30, 40, and 50 A.
- Dimensions: 17 3/4" W x 7 3/4" H x 31/2" D.

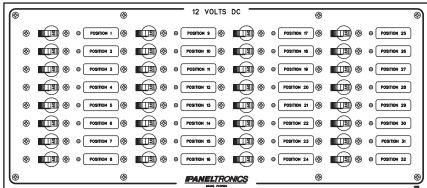

420

