
4308 AC Eighteen Branch Circuits with Shore and Generator Mains

4308 AC Eighteen Branch Circuits With Shore And Generator Mains 120/240 VAC 60 HZ

GENERAL FEATURES & BENEFITS

- Completely pre-wired to reduce installation time
- Over 2000 interchangeable function labels available.
- Panel face is 1/8" corrosion resistant aluminum coated with two-part polyurethane.
- High accuracy rear mounted meters.
 Digital meters are optional.

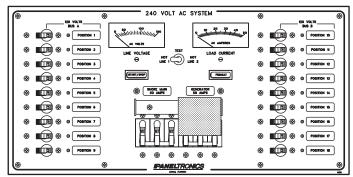

- 4308
- Panel mounted, isolated hot, neutral, and safety ground bus bars on AC breaker panels.
- LED Indicators provided on all Premier Line Panels
- Hydraulic/magnetic, trip free Circuit Breakers.
- Voltage and Shore Cord Current: 50 AMPS, 240 VAC-60 HZ
- Main Breakers: Shore: 50 AMP, 240 VAC, 60 HZ three pole main breaker standard.
 Generator: 50 AMP, 240 VAC, 60 HZ three pole main breaker is standard. Other ratings available.
- Branch Circuits: Available in 5, 10, 15. 20 25 30 40, and 50 AMP breakers are available
- Metering: 0-150 VAC scale Voltmeter and 0-50 ACA scalp Ammeter are standard. Other analog scales and digital meters are available.
- Generator: Rocker switches on both preheat and stop/start
- Dimensions: 17 3/4" W X 8 3/4" H X 3 1/2" D.
- Color: Black is standard. Optional: White, Gray and Beige.

