



Water System Hoses



HARDWALL WATER HOSE Series 100

Premium quality marine water hose suitable for a variety of applications including engine water intake and circulation, bilge discharge, livewell systems and other non-fuel uses. A fully embedded helical wire provides strength and flexibility. Resists heat, ozone, mild acids, bilge oils and engine water. Color coded with green strip brand.

Part No.	I.D.	O.D.	Spiral Ply	Burst Pressure	Weight Per CFT
100-0120	1/2"	7/8"	2	600#	27
100-0580	5/8"	1"	2	500#	31
100-0340	3/4"	1-1/8"	2	400#	35
100-0780	7/8"	1-1/4"	2	400#	40
100-1000	1"	1-5/16"	2	300#	44
100-1180	1-1/8"	1-1/2"	2	300#	54
100-1140	1-1/4"	1-5/8"	2	280#	61
100-1560	1-5/16"	1-21/32"	2	280#	63
100-1380	1-3/8"	1-11/16"	2	240#	66
100-1120	1-1/2"	1-7/8"	2	240#	76

- Bulk pack: 50' coil.
- Distributor pack: 6.25', 12.5' and 50' payout box.




STANDARD BILGE HOSE Series 120

Heavy corrugated polyethylene hose provides outstanding flexibility. Resists oily bilge acids and sea water. Custom molded cuff every foot for easy installation and clamping. Ideal for electric and manual bilge pumps and livewell aerators. Also available in white (Series 121).

Part No.	I.D.	Bend Radius	VAC Rating	Weight Per CFT	Bulk Carton
120-0580	5/8"	1"	20	5	600'
120-0340	3/4"	2"	20	6	500'
120-1180	1-1/8"	4"	20	7	250'
120-1140	1-1/4"	5"	20	10	250'
120-1120	1-1/2"	6"	20	13	150'

- Distributor pack:
5/8" thru 1-1/8" – 6' and 9' poly bag.
1-1/2" – 25' payout box.
All sizes – 50' payout box.

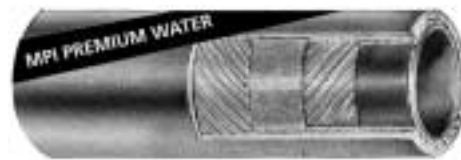

SOFTWALL WATER HOSE Series 110

Premium quality marine water hose suitable for a variety of applications including engine water circulation, bilge discharge, sanitation connections, scupper lines and other non-fuel uses. Resists heat, ozone, mild acids, bilge oils and engine water. Color coded green strip brand.

Part No.	I.D.	O.D.	Spiral Ply	Burst Pressure	Weight Per CFT
110-0120	1/2"	7/8"	2	600#	27
110-0580	5/8"	1"	2	500#	31
110-0340	3/4"	1-1/8"	2	400#	35
110-0780	7/8"	1-1/4"	2	400#	38
110-1000	1"	1-3/8"	2	300#	42
110-1180	1-1/8"	1-1/2"	2	300#	47
110-1140	1-1/4"	1-5/8"	2	280#	55
110-1560	1-5/16"	1-11/16"	2	280#	57
110-1380	1-3/8"	1-3/4"	2	240#	58

- Bulk pack: 50' coil.
- Distributor pack: 6.25', 12.5' and 50' payout box.



CLEAR PVC TUBING Series 150

Single extrusion, non-toxic vinyl hose produced with FDA approved compound. Recommended for non-pressurized cool water uses such as fresh water, sink, shower, livewell and refrigerator drain lines.

Part No.	I.D.	Wall Thickness	Working Pressure	Weight Per CFT	Bulk Coil
150-0140	1/4"	.078"	60#	4	200'
150-0560	5/16"	.063"	50#	4	200'
150-0380	3/8"	.094"	55#	6	200'
150-0120	1/2"	.110"	45#	12	200'
150-0580	5/8"	.110"	45#	15	200'
150-0340	3/4"	.110"	40#	19	200'
150-1000	1"	.125"	35#	27	200'
150-1140	1-1/4"	.156"	20#	32	100'
150-1120	1-1/2"	.188"	20#	36	100'

- Distributor pack: 10' poly bag, 25' and 50' payout box.





Water System Hoses



HEAVY DUTY WATER/HEATER HOSE Series 132

Heavy wall EPDM tube and cover reinforced with high strength polyester yarn. Used mainly for engine water, water heater, bait box, air conditioner circulation, icebox, sink and shower drain lines. Resistant to mild chemicals, heat, cold, ozone and sea water. Operating temperature range -40°F to +210°F.

Part No.	I.D.	O.D.	Working Pressure	Weight Per CFT	Bulk Reel
132-0380	3/8"	11/16"	200#	16	500'
132-0120	1/2"	13/16"	200#	20	500'
132-0580	5/8"	15/16"	200#	23	500'
132-0340	3/4"	1-1/8"	200#	34	500'
132-1000	1"	1-5/16"	200#	39	300'
132-1140	1-1/4"	1-3/4"	150#	71	500'
132-1120	1-1/2"	2"	150#	80	350'

- Distributor pack:
Up to 1 1/4" - 10' poly bag and 25' payout box.
All Sizes - 50' payout box.



EXTRA HEAVY DUTY WATER HOSE Series 134

Heavy wall EPDM tube and cover reinforced with double braid of high strength polyester yarn. Designed for critical water connections where high strength and better flexibility are important. Used for heat exchanger, engine water intake and circulation, water heater and air conditioner. Excellent bend radius. Resists heat, cold, ozone, mild chemicals and sea water. Operating temperature range -40°F to +210°F.

Part No.	I.D.	O.D.	Working Pressure	Weight Per CFT	Bulk Reel
134-0580	5/8"	1"	300#	31	400'
134-0340	3/4"	1-3/16"	300#	40	300'

- Distributor pack: 10' poly bag, 25' and 50' payout box.



PVC BILGE VAC HOSE Series 141

Smooth clear vinyl tube reinforced with black PVC helical rod. Tube produced from FDA approved compound suitable for potable water. Excellent flexibility for use as bilge pump discharge, live well circulation and scupper drains.

Part No.	I.D.	Bend Radius	Vac Rating	Weight Per CFT
141-0580	5/8"	1/2"	20	8
141-0340	3/4"	3/4"	20	10
141-1180	1-1/8"	1"	20	16
141-1140	1-1/4"	1-1/2"	28	19
141-1120	1-1/2"	1-5/8"	28	24
141-2000	2"	1-3/4"	28	34
141-3000	3"	2"	28	34

- Bulk pack: 100' coil.
- Distributor pack:
3/4" and 1-1/8" - 9' poly bag.
1-1/2" - 10' payout box.
All sizes - 50' payout box.



HEAVY DUTY PVC LIVEWELL HOSE - CLEAR Series 145

Clear vinyl reinforced with gray PVC helix provides excellent flexibility and bend radius for heavy duty livewell and bilge pump circulation and discharge. Smooth outer surface permits easy clamping. Clear hose allows for visual inspection of any blockage. Not suitable for pressurized water systems.

Part No.	I.D.	O.D.	Bend Radius	Vac Rating	Weight Per CFT
145-0120	1/2"	5/8"	2"	28	16
145-0580	5/8"	3/4"	2"	28	18
145-0340	3/4"	15/16"	3"	28	20
145-1000	1"	1-1/4"	3"	28	27
145-1180	1-1/8"	1-3/8"	3"	28	29
145-1140	1-1/4"	1-1/2"	3"	28	30
145-1120	1-1/2"	1-13/16"	4"	28	40
145-2000	2"	2-3/8"	4"	28	48

- Bulk pack: 100' coil.
- Distributor pack:
1-1/2" - 10' payout box.
All sizes - 50' payout box.





Water System Hoses



CORRUGATED PVC WATER HOSE/FDA Series 140

Flexible vinyl hose with smooth inside surface for sink and shower drains, potable water fill, and heavy duty bilge discharge. Excellent bend radius. FDA approved compound. Use with Series 147 PVC hose end cuff.

Part No.	I.D.	Bend Radius	Vac Rating	Weight Per CFT
140-0340	3/4"	3/4"	20	12
140-1000	1"	1"	20	16
140-1180	1-1/8"	1-1/4"	20	20
140-1140	1-1/4"	1-1/2"	28	24
140-1120	1-1/2"	2"	28	28

- Bulk pack: 100' coil.
- Distributor pack:
1" and 1-1/2" – 10' payout box.
All sizes – 50' payout box.



HOSE CUFF Series 147

Made of durable PVC using FDA materials. Provides excellent clamping surface for Series 140 corrugated PVC water hose. Apply with sealing compound for water tight fit. Right hand thread.

Part No.	I.D.	Bulk Pack	Weight Per C
147-0340	3/4"	100	7
147-1000	1"	100	9
147-1140	1-1/4"	100	12
147-1120	1-1/2"	100	13



WIRE REINFORCED PVC WATER HOSE Series 140W

Extremely flexible vinyl hose supported by vinyl coated helical steel wire. Nylon reinforcement added to 1-1/2" I.D. hose for added strength. For use as heavy duty bilge discharge and various drain lines. Left hand thread.

Part No.	I.D.	Bend Radius	VAC Rating	Weight Per CFT
140-0340W	3/4"	3/8"	28	8
140-1000W	1"	1/2"	28	12
140-1120W	1-1/2"	3/4"	28	23



HEAVY DUTY PVC LIVEWELL HOSE - BLACK Series 149

Helical PVC reinforcement provides excellent flexibility and bend radius for heavy duty livewell and bilge pump applications. Smooth outer surface allows easy clamping. Not suitable for pressurized water systems.

Part No.	I.D.	O.D.	Bend Radius	Vac Rating	Weight Per CFT
149-0340	3/4"	31/32"	3"	28	20
149-0580	5/8"	13/16"	3"	28	20
149-1000	1"	1-1/4"	3"	28	27
149-1100	1-1/16"	1-9/32"	3"	28	28
149-1180	1-1/8"	1-11/32"	3"	28	28
149-1140	1-1/4"	1-1/2"	4"	28	30
149-1120	1-1/2"	1-13/16"	4"	28	40
149-2000	2"	2-3/8"	5"	28	60

- Bulk pack: 50' coil.
- Distributor pack: 6.25' / 12.5' / 50' payout box.





Water System Hoses



CLEAR REINFORCED PVC TUBING RED AND BLUE TRACER Series 162

Heavy duty, all clear vinyl tubing reinforced for hot or cold pressurized water systems and many other uses. Non-toxic, odorless, tasteless and FDA approved compound. Operating temperature range -20°F to +150°F.

Part No.	I.D.	Wall Thickness	Working Pressure	Weight Per CFT	Bulk Coil
162-0380	3/8"	.094"	180#	12	250'
162-0120	1/2"	.110"	200#	14	250'
162-0580	5/8"	.110"	175#	18	250'
162-0340	3/4"	.125"	160#	23	250'
162-1000	1"	.125"	140#	28	100'
162-1180	1-1/8"	.125"	120#	32	100'
162-1140	1-1/4"	.188"	100#	34	100'
162-1120	1-1/2"	.250"	100#	38	100'

- Distributor pack:
Up to 1" – 10' poly bag and 25' payout box.
All Sizes – 50' payout box.



WHITE REINFORCED PVC TUBING BLUE TRACER Series 164

Heavy duty, clear vinyl cover with white inner tube reinforced for wash down, pressurized water systems, hot/cold water vent and drain lines. Non-toxic, odorless, tasteless and FDA approved compound. Operating temperature range -20°F to +150°F.

Part No.	I.D.	Wall Thickness	Working Pressure	Weight Per CFT
164-0120	1/2"	.110"	200#	14
164-0580	5/8"	.110"	175#	18
164-0340	3/4"	.125"	160#	23

- Bulk pack: 250' coil.
- Distributor pack: 10' poly bag and 25' and 50' payout box.



PVC AIR-CON Series 163

Extra heavy duty white PVC cover with black PVC inner tube reinforced with braided polyester yarn. Specially formulated for chiller circulation and drain lines in air conditioner systems. Superior kink resistance. Operating temperature range -40°F to +150°F.

Part No.	I.D.	O.D.	Working Pressure	Burst Pressure	Weight Per CFT	Bulk Coil
163-0120	1/2"	3/4"	150#	600#	16	250'
163-0580	5/8"	.895"	100#	450#	20	250'

- Distributor pack: 50' payout box.



HEAVY DUTY CLEAR REINFORCED PVC TUBING Series 165

Extra Heavy duty clear vinyl tubing reinforced for superior kink resistance. Suitable for hot or cold pressurized water systems and many other uses. Made from FDA approved compound. Operating temperature range -20°F to +150°F.

Part No.	I.D.	Wall Thickness	Working Pressure	Weight Per CFT	Bulk Coil
165-0140	1/4"	.125"	200#	6	300'
165-0380	3/8"	.125"	200#	9	300'
165-0120	1/2"	.125"	150#	14	300'
165-0580	5/8"	.125"	150#	16	300'
165-1340	3/4"	.135"	125#	21	300'
165-1000	1"	.185"	90#	31	100'
165-1140	1-1/4"	.250"	75#	31	100'
165-1120	1-1/2"	.250"	75#	65	100'

- Distributor pack:
Up to 1" – 10' poly bag and 25' payout box.
All Sizes – 50' payout box.

